## **PRODUCT INFORMATION**


Description	48-110V LED Amber Stripe Zone Light, Short Bracket	
Height	48.00 mm / 1.89 in	
Width	150.00 mm / 5.91 in	
Depth	63.00 mm / 2.48 in	
Shape	Rectangular	
Outer Lens Material	Polycarbonate	
Outer Lens Color	Clear	
Housing Material	Aluminum	
Housing Color	Black	
Bezel Color	Black	
Mounting Hardware Description	(x1) 5/16"-18 x 1.00" Mounting Bolt Bracket	
Mounting Hardware Description Mounting Type		
	Bracket	
Mounting Type Minimum Operating	Bracket Pedestal	
Mounting Type Minimum Operating Temperature Maximum Operating	Bracket Pedestal -40 °C / -40 °F	
Mounting Type Minimum Operating Temperature Maximum Operating Temperature	Bracket Pedestal -40 °C / -40 °F 65 °C / 149 °F	
Mounting Type Minimum Operating Temperature Maximum Operating Temperature Connector or Wiring	Bracket Pedestal -40 °C / -40 °F 65 °C / 149 °F Deutsch DT04-2P Deutsch DT06-2S with harness included	
Mounting Type Minimum Operating Temperature Maximum Operating Temperature Connector or Wiring Mating Connector	Bracket Pedestal -40 °C / -40 °F 65 °C / 149 °F Deutsch DT04-2P Deutsch DT06-2S with harness included with flying leads	







## **PRODUCT DIMENSIONS**

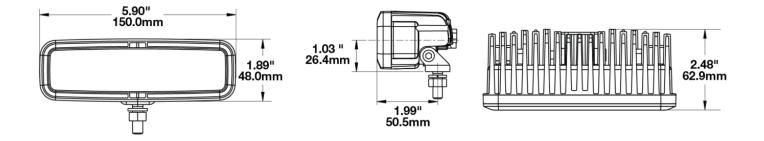

### **ELECTRICAL SPECIFICATIONS**

Input Voltage	48-110V DC
Operating Voltage	38-120V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Black Wire	Ground
Red Wire	Power
Current Draw	0.350A @ 48V DC 0.409A @ 60V DC 0.350A @ 72V DC 0.407A @ 80V DC

### **REGULATORY STANDARDS COMPLIANCE**



Buy America Standards IEC IP69K Eco Friendly UL Recognized

#### Print date: 2020-12-02

© 2020 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



#### **PHOTOMETRIC SPECIFICATIONS**

Raw Lumen Output Effective Lumen Output Candela Output Beam Pattern(s)	1,113 210 2,200 Warning - Keep Out Zone	Pattern : Max Lux :	4ft 10ft x 5in 1120	8ft 20ft x 10in 490	16ft 40ft x 20in 110
APPLICATIONS	truction	Material	Minir	ng Railroa	ad Specialty

### **PRODUCT WARNINGS**

For California residents: ▲ WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>. ▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.





### **RELATED PRODUCTS**



12-36V LED Red, Short

Part Number

1603631

Bracket



Part Number

1603641

Bracket



Part Number

Stripe Zone Light,

Short Bracket

1603651

12-36V LED Blue, Short 12-36V LED Amber



Part Number 1603681 12-36V LED Red Stripe Zone Light with Shroud, Short Bracket



Part Number 1603761 12-36V LED Red Stripe, Long Bracket







Part Number 1603771 12-36V LED Blue Stripe, Long Bracket Part Number 1603781 12-36V Amber Stripe Zone Light, Long Bracket

Part Number 1603791 12-36V Red Stripe with Shroud, Long Bracket

Print date: 2020-12-02 © 2020 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

